O.M.B. NO. 3067-0077 Expires May 31, 1996

PERMIT # B1248

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.


SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
ROSCOE VENTURES					POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER #17 VERDIER BLUFF					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and I	Block Numbers, etc.)				
CITY				STATE	ZIP CODE
CITY OF BEAUFOR		TH CAROL		02	
	SECTION B FL	OOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the	he proper FIRM (See	Instructions):	Terror and	111	
1 COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
450026	0005	D	11-04-92	A-8	(in AO Zones, use depth)
3. For Zones A or V, where	no BFE is provided of	n the FIRM, ar	ase Flood Elevations (BFE nd the community has esta FIRM datum-see Section	blished a BFE f	Other (describe on bac or this building site, indicate
		135	NG ELEVATION INFORM		
(c). FIRM Zone A (without below (check one)(d). FIRM Zone AO. The fone) the highest grade	is at an elevation of	I as the referer jacent to the b ence level fron ng. If no flood	refeet NGVD (or other FIRM nee level from the selected uilding.	d datum-see Siddiagram isfeet a exist the building	ection B. Item 7). feet above or bove or below (check 's lowest floor (reference
Indicate the elevation dat under Comments on Pag the FIRM [see Section E equation under Commen	um system used in de e 2). (NOTE: If the e 3. Item 7], then conve ts on Page 2.)	etermining the elevation datun nt the elevation	above reference level eleven used in measuring the elens to the datum system us	rationsXX NG\ evations is diffe ed on the FIRM	/D '29 Other (describe
. Elevation reference mark	• •			/	
. The reference level eleval (NOTE: Use of construct case this certificate will or will be required once cons	tion drawings is only vally be valid for the built	alid if the build Iding during the	ling does not yet have the	reference level	floor in place, in which tion Elevation Certificate
. The elevation of the lowe Section B, Item 7).	st grade immediately	adjacent to the	e building is: 23.17	feet NGVD	(or other FIRM datum-see
	SE	CTION D CC	MMUNITY INFORMATIO	N -SEE MARIE A	
. If the community official rules not the "lowest floor" as floor" as defined by the oil. Date of the start of constr	s defined in the comm rdinance is:	unity's floodpla	ain management ordinanc IGVD (or other FIRM datui	e, the elevation	


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features–If the certifier is unable to certify to breakaway/non-breakaway wall. enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

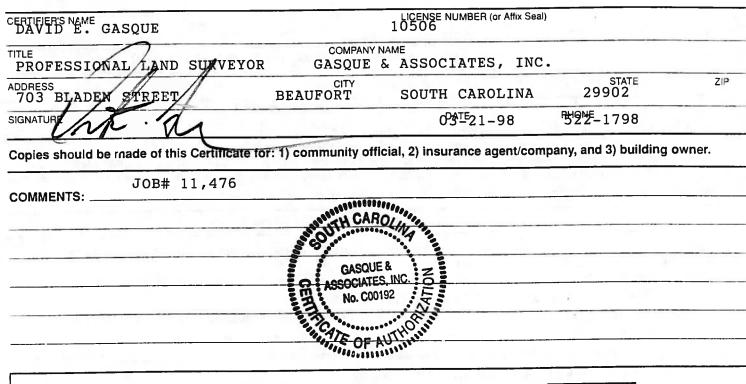

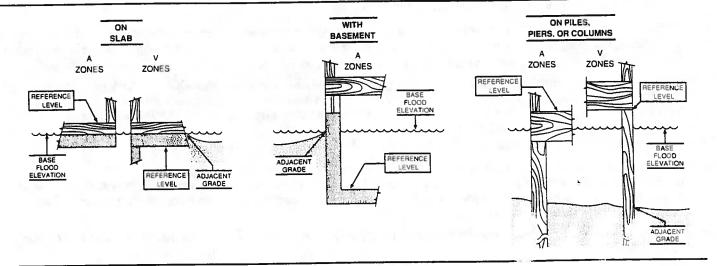

The diagrams above illustrate the points at which the elevations should be measured in A .

es √Z ∋s.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.